

# SINKER

DESIGN BY HAY



Sinker's simple form and etched acrylic diffuser emits a warm, even source of illumination. The moulded ABS shade is supplied in a matt black or grey finish, and comes with a dimmable LED bulb. The pendant is available in large and small size.

## PRODUCT DETAILS

- / Part of a progressive and technologically advanced lighting collection.
- / A flexible, uncomplicated directional pendant lamp in both large and small sizes.
- / CE approved.
- / Supplied with a replaceable standard E27 LED dimmable bulb with an estimated life span of 25.000 hours of use.
- / The fitting can be used in conjunction with a number of standard wall mounted dimming control units.
- / Suitable for both private and office environments.
- / Qualified for contract use.
- / For indoor use only.

# HAY

**MATERIAL**

LAMP SHADE / Injection moulded  
ABS.

DIFFUSER / Injection moulded ABS.

CORD / Fabric cord.

CEILING CAP / Incection moulded ABS

**COLOUR & FINISH**

Please note that the colour codes are indicative.

Available in 4 different colours.

- / Soft black (RAL 9004)
- / Dusty grey (RAL 7037)
- / Red (NCS S 4050-Y90R)
- / White (RAL 9010)

**COLOUR**




**DIMENSIONS**

**SMALL**

- / DIAMETER 23 cm / 9"
- / HEIGHT 19 cm / 7.5"

**LARGE**

- / DIAMETER 37,5 cm / 14.8"
- / HEIGHT 35 cm / 18.8"

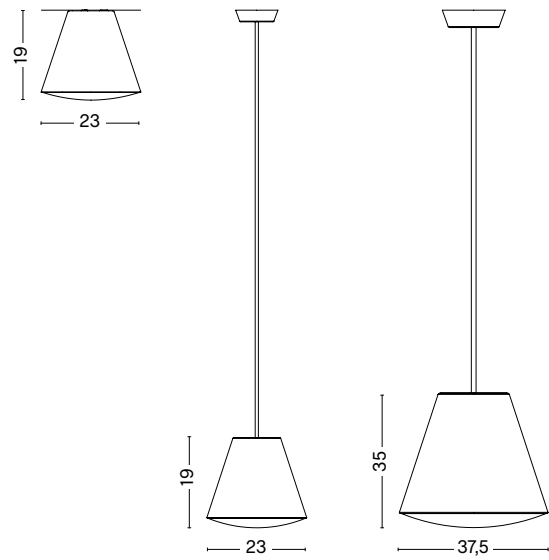

## TECHNICAL SPECIFICATIONS

- / LIGHT SOURCE / E27 / LED
- / POWER\* (watts) / 9,9-12,6W
- / FLUX\* (lumens) / 660-795lm
- / CCT\* (kelvin) / 2800k
- / CRI\* (1-100) / 85
- / DIMMABLE / Yes
- / POWER SUPPLY / 220-240V AC at 50-60Hz  
UK/EU plug mounted adapter
- / CORD LENGTH / 400 cm
- / SWITCH / No

\*Measurements taken from production luminaire

## CERTIFICATIONS

CE approved: This product has been assessed and complies with the essential requirements of the relevant European directives.




Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 55015:2013 (radio disturbance)
- / EN 61547:2009 (EMC immunity)
- / EN 61000-3-2:2014 (EMC compatibility)
- / EN 61000-3-3:2013 (EMC compatibility)
- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)
- / EN 62493:2010 (human exposure to EMC)

## PHOTOMETRICS

SINKER / SMALL

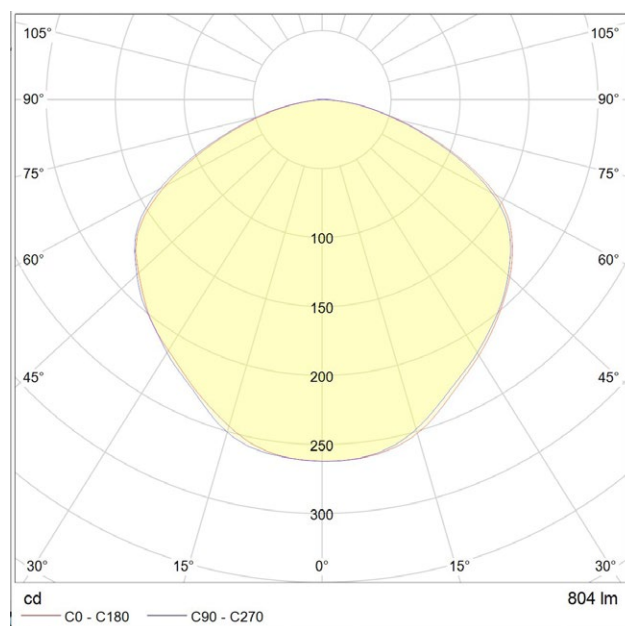

## DOWNLOADS

2D files, 3D files and packshots are available in our imagebank at hay.com.

Care and maintenance instructions and CE attestation of conformity certificates are available at hay.com

An overview of the complete Hay lighting collection and accessories, can be found at [hay.dk/en-gb/products/lighting/all-lighting](http://hay.dk/en-gb/products/lighting/all-lighting)

## TECHNICAL SPECIFICATIONS

- / LIGHT SOURCE / E27 / LED
- / POWER\* / 9,9-12,6W
- / FLUX\* (LUMENS) / 660-795lm
- / CCT\* (KELVIN) / 2800k
- / CRI\* (1-100) / 85
- / DIMMABLE / Yes
- / POWER SUPPLY / 220-240V AC at 50-60Hz  
UK/EU plug mounted adapter
- / CORD LENGTH / 400 cm
- / SWITCH / No

\*Measurements taken from production luminaire

## CERTIFICATIONS

CE approved: This product has been assessed and complies with the essential requirements of the relevant European directives.




Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 55015:2013 (radio disturbance)
- / EN 61547:2009 (EMC immunity)
- / EN 61000-3-2:2014 (EMC compatibility)
- / EN 61000-3-3:2013 (EMC compatibility)
- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)
- / EN 62493:2010 (human exposure to EMC)

## PHOTOMETRICS

SINKER / LARGE

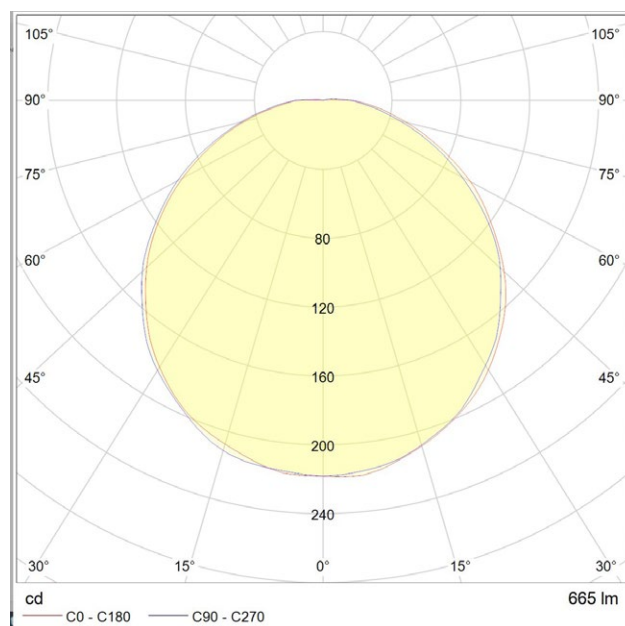

## DOWNLOADS

2D files, 3D files and packshots are available in our imagebank at hay.com.

Care and maintenance instructions and CE attestation of conformity certificates are available at hay.com

An overview of the complete Hay lighting collection and accessories, can be found at [hay.dk/en/contract/products/lighting](http://hay.dk/en/contract/products/lighting)

# HAY